




Ball Burnishing



Cleaning



Deburring



Degreasing



Descaling



Polishing



Radiusing



Smoothing

RÖSLER[®]
finding a better way ...



RT Series




Racetrack Vibrators


ROSLEK RT Series Racetrack Vibrators

Features:

- Equally suited for batch and continuous processing
- Ideal for facilities with limited floor space
- 360-degree spiral-bottom design with internal separation system
- Powered by a single heavy duty double-flange high-energy vibratory motor with adjustable RPM
- Ideally suited for ball burnishing applications
- Wear-resistant lining made from rubber or polyurethane
- Infeed chute under the screen area to load parts easily
- Standard features include: media unload plug, large separation area, and easy to change separation screens

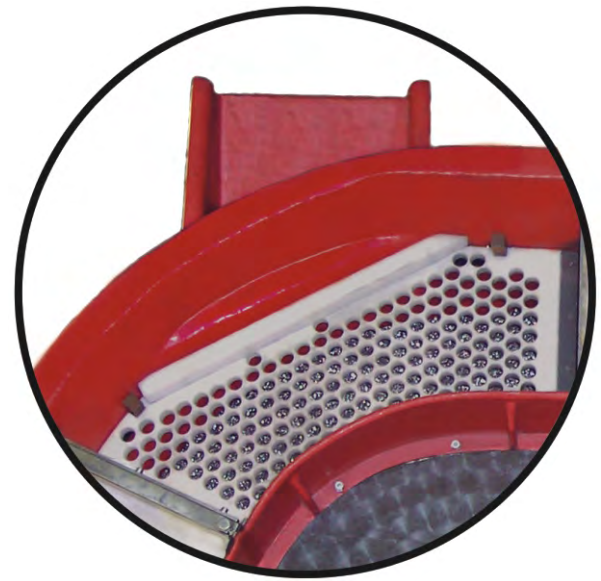

Single drive

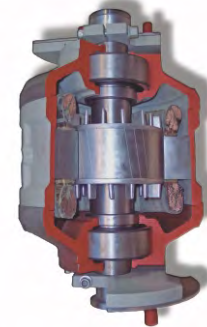

plenty of horsepower

Up to 17 feet of processing channel with small footprint

Technical Specifications

	Process Channel Length	Process Channel Width	Usable Volume of Work Bowl	Power of Vibratory Motor	Standard Motor Speed
RT 15	17 feet	13 inches	15 cubic feet	10 Hp	1800 rpm
RT 20	23 feet	14 inches	20 cubic feet	17 Hp	1800 rpm
RT 32	24 feet	17 inches	32 cubic feet	17 Hp	1800 rpm

www.rosler.us

ROSLEK Metal Finishing USA L.L.C.
 1551 Denso Road
 Battle Creek, MI 49037
 Phone: (269) 441-3000
 Fax: (269) 441-3001
 info@rosler.us

ROSLEK[®]
finding a better way ...