

WETBLAST FLEX™

ALL-IN-ONE WETBLAST SYSTEM

Our all-in-one **WETBLAST FLEX™** system gives you convenience you don't get from traditional slurry systems. Its design, simplified set up, and ease of operation make for a more productive blasting experience. Because we mix the abrasive and water after it leaves the blast machine, you never have to empty a machine of messy water/abrasive mix.

Flexible set up options allow you to position the water injector either at the base of the blast machine or at the nozzle – your choice. With the injector at the nozzle, you can adjust the water/abrasive mix at any time.

Switch to dry-blasting with the FLEX in just a few minutes, simply remove the water injector body, and turn off air to the pump.



CLEMCO[®]
INDUSTRIES CORP.

Distributed by:

CLEMCO[®]



WETBLAST FLEX™
ALL-IN-ONE WETBLAST SYSTEM


**Committed to extraordinary products,
technical support and service**

ISO 9001 Certified



Features and Benefits

- **SKID MOUNTED**
All-in-one convenient design with fork lift pockets and lifting eyes.
- **WATER SOURCE**
On board water tank or municipal water source – add rust inhibitor if needed.
- **ABRASIVE CUT OFF SWITCH**
With injector and ACS at the nozzle, you can control wash down and surface blow off without a trip to the blast machine.
- **NO POT TENDER NEEDED**
With the injector adaptor and ACS mounted at the nozzle, there's no need for a pot tender.

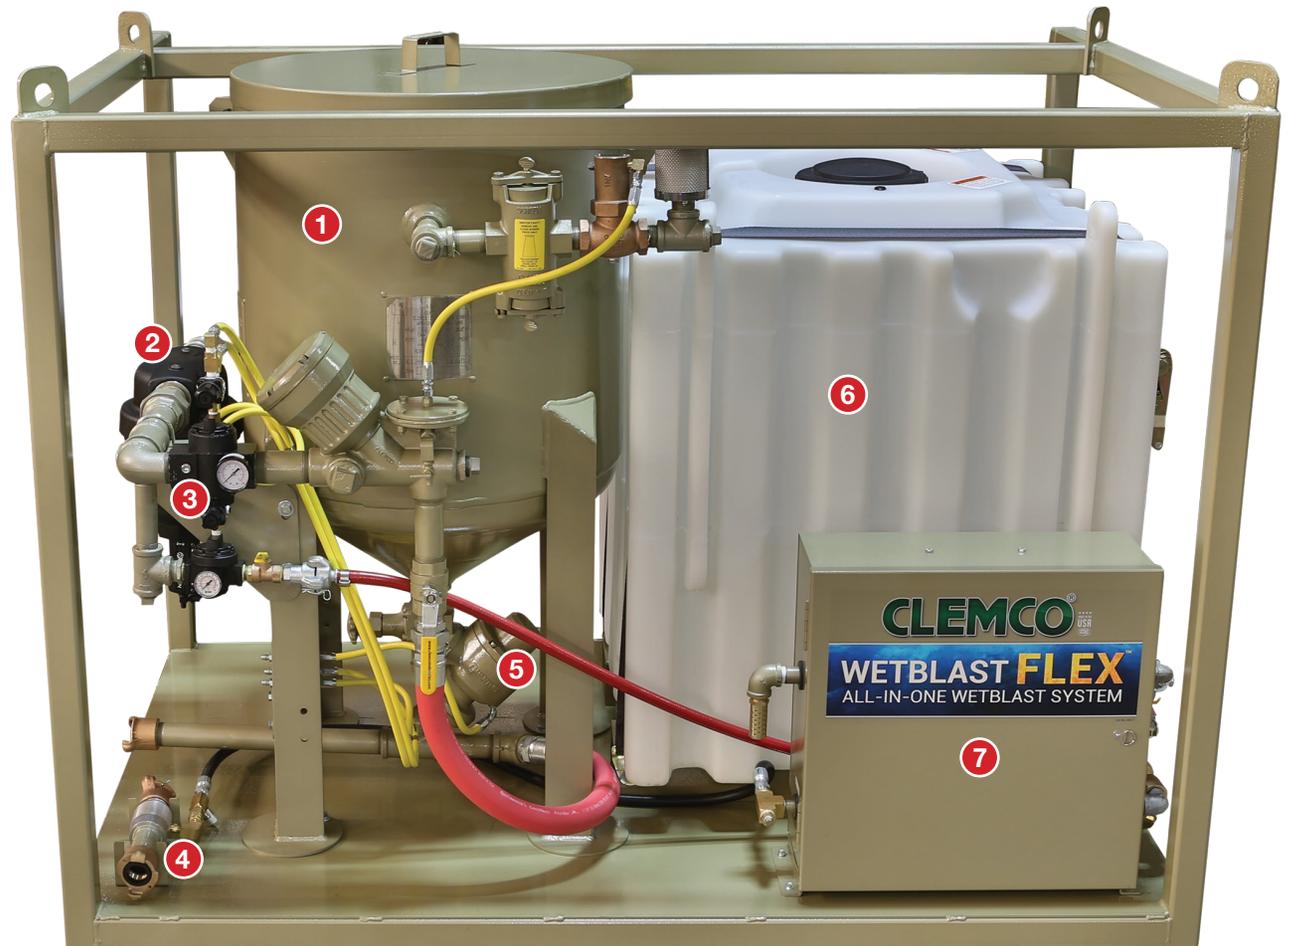

FLEX - *BASE UNIT

- ➊ 6ft³ Blast Machine with Pneumatic Remotes and 50 ft Control Line
- ➋ Moisture Separator
- ➌ High-flow Regulator
- ➍ Base-Mount Wetblast Injector™
- ➎ Abrasive Cut-Off Switch
- ➏ 120 Gallon Water Tank
- ➐ Wetblast Injector™ Pump Module
 - Standard Wetblast Injector™ with 50' Hose
 - Blast Machine Screen & Cover
 - 1½" Pressure Regulator & Air Filter

* Systems differ with choice of nozzle injector adaptor – contractor or fine thread.

FLEX - PACKAGE

- Base Unit
- 50' Coupled Supa Hose
- #7 Long-Venturi Nozzle
- Apollo 600 HP DLX
- Clem-Cool Air Conditioner
- 50' Respirator Hose
- CPF-20 (installed on skid)
- Nominal Spares

Ordering Information

	Base Unit	Package
FLEX 50-120 psi		
Contractor Thread	28434	28435
1-1/4" Thread	28436	28437
LP FLEX 5-120 psi		
Contractor Thread	28632	28634
1-1/4" Thread	28633	28635